

**LL STAGE CYC** is a compact LED cyclorama/ wall wash luminaire with uniform light distribution and dynamic colour changing. It is available in five basic light colour variations.

It is special designed for theater, television, studios back stage lighting or soft front lighting with high CRI (>95).

LL STAGE CYC is compatible with DMX 512.

### Applications


- Back stage area lighting, concerts, television, theatre, studios
- Soft front lighting

IP20 | AC90-264V | DMX512




### Dimensions:

A=300mm/11.8" | B=180mm/7.1" | C=320mm/12.6"

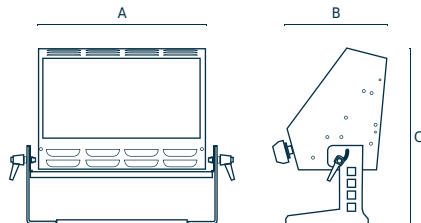

### Technical specification:

Lamp type	72 x LED
Reflector	Special reflective material
Control data connection	DMX 512 In/Out with XLR 5pin
Power connection	AC90-264V, 47-63Hz In/Out PowerCon
Max. input power	200 W
Net weight	5,0 kg (11,0 lb)
Lifetime	75.000 hours (70% lumen maintenance at $T_s = +25^{\circ}\text{C}$ (77°F))
Ambient temp. (Ta)	Maximum 40°C (104°F)
Cooling	Active cooling 5dB @1m
Installation	Fast mounting using Camlocs
Materials and finish	Powder painted anodized aluminium in RAL 9005 (other colours on request)

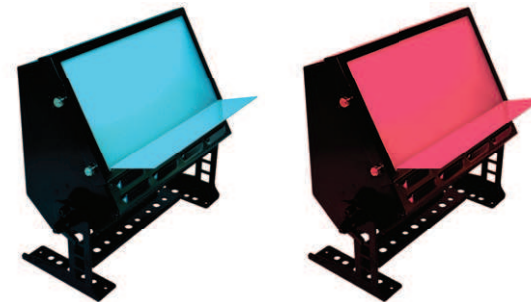

### Order data luminaires:

Order code	Product name
LL36 131.1	LL STAGE CYC 6C RGBAWN MO
LL36 132.1	LL STAGE CYC 3C AWN MO
LL36 130.1	LL STAGE CYC 2C WN MO
LL36 133.1	LL STAGE CYC 1C W 5600K MO
LL36 134.1	LL STAGE CYC 1C N 3200K MO

### Order data accessories:

Order code	Product name
LL36 135.1	LL STAGE CYC TUBUS
LL36 136.1	LL STAGE CYC POLE OPERATION BRACKET PO